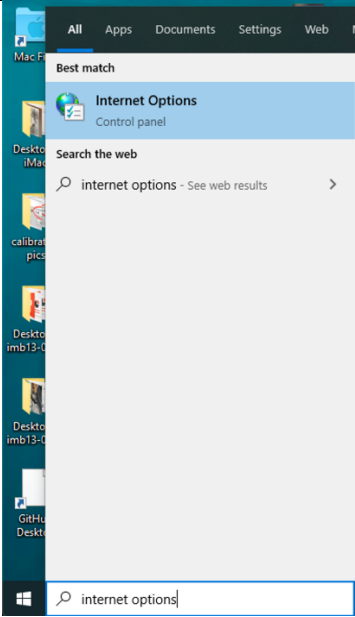
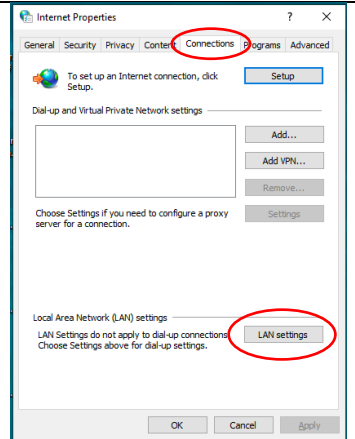
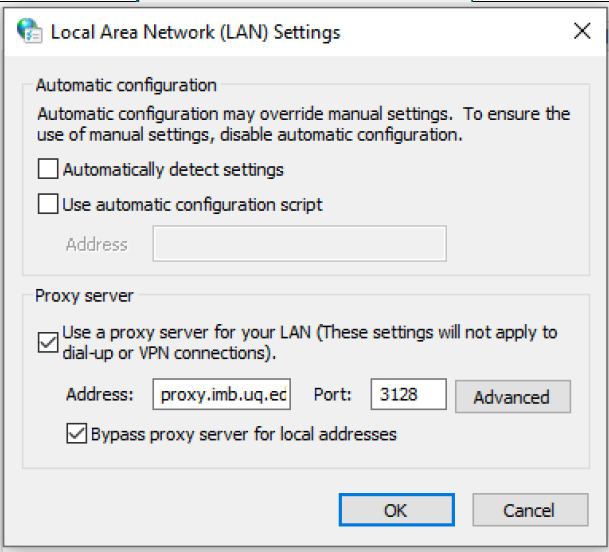


Proxy Server Settings

<ul style="list-style-type: none"> • Click on the Windows Start Button and type “Internet Options” • (Window 7 will look slightly different, but this method will still work) • Click on “Internet Options” when it appears in the search bar 	 <p>A screenshot of the Windows search interface. The search bar at the top contains the text 'internet options'. Below the search bar, the results show 'Internet Options' as the best match, with a link to the Control Panel. There is also a search bar for the web with the text 'internet options - See web results'.</p>
<ul style="list-style-type: none"> • Internet Properties will open, • Click on the “Connections” tab • Now click on the “LAN settings” button at the bottom of the window 	 <p>A screenshot of the 'Internet Properties' dialog box, with the 'Connections' tab selected. The 'Connections' tab is circled in red. At the bottom of the dialog, the 'LAN settings' button is also circled in red. Other buttons like 'Add...', 'Add VPN...', 'Remove...', and 'Settings' are visible.</p>
<ul style="list-style-type: none"> • Set the proxy settings as shown below • Untick the first two tickboxes • Tick “Use a proxy server for your LAN.....” • Enter “proxy.imb.uq.edu.au” into the Address field • Enter “3128” into the Port field • Tick “Bypass proxy server for local addresses” • click “OK” to close the window. 	 <p>A screenshot of the 'Local Area Network (LAN) Settings' dialog box. Under 'Automatic configuration', the checkboxes for 'Automatically detect settings' and 'Use automatic configuration script' are unchecked. Under 'Proxy server', the checkbox 'Use a proxy server for your LAN (These settings will not apply to dial-up or VPN connections)' is checked. The 'Address' field contains 'proxy.imb.uq.ec' and the 'Port' field contains '3128'. The checkbox 'Bypass proxy server for local addresses' is also checked. The 'OK' button is highlighted with a blue border.</p>